



# OSウォール (大型)

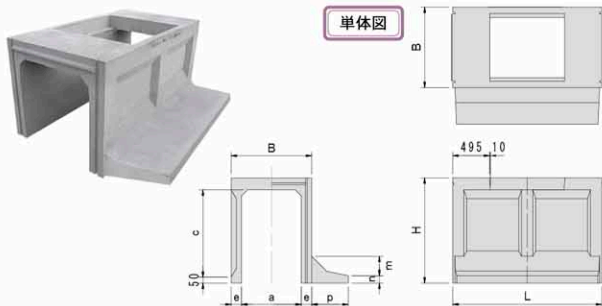

呼び名	参考質量 (kg)	価格 (円)	寸法 (mm)																
			a	c	L	B	H	e	p	m	n								
700x 700	1552		700		2000	970	900	135			100								
800	1629	700					1000												
900	1707	900					1100												
1000	1785	1000					1200												
1100	1862	1100					1300												
1200	1940	1200					1400												
1300	2211	1300					1500												
1400	2289	1400					1600												
1500	2367	1500					1700												
1600	2444	1600					1800												
1700	2522	1700					1900												
800x1000	1909						800						2000	1080	1210	140			100
1100	1991	800													1310				
1200	2073	900	1410																
1300	2345	1000	1510																
1400	2432	1100	1610																
1500	2514	1200	1710																
1600	2596	1300	1810																
1700	2679	1400	1910																
1800	2761	1500	2010																
1900	2844	1600	2110																
900x1000	2035		900		2000	1190	1220	145			100								
1100	2122	900					1320												
1200	2209	1000					1420												
1300	2485	1100					1520												
1400	2572	1200					1620												
1500	2664	1300					1720												
1600	2751	1400					1820												
1700	2838	1500					1920												
1800	2925	1600					2020												
1900	3057	1700					2120												
1000x1000	2170						1000						2000	1300	1230	140			100
1100	2262	1000	1330																
1200	2354	1100	1430																
1300	2445	1200	1530																
1400	2726	1300	1630																
1500	2818	1400	1730																
1600	2915	1500	1830																
1700	3006	1600	1930																
1800	3098	1700	2030																
1900	3235	1800	2130																
2000	3326	1900	2230																

# 標準断面数量表

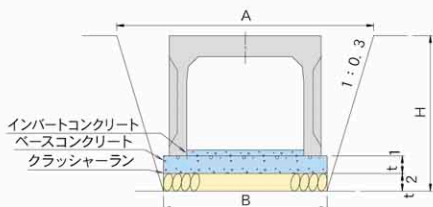

ベースコンクリートを打設する場合

呼び名	t <sub>1</sub> (mm)	t <sub>2</sub> (mm)
700	100	150
800	100	150
900	150	150
1000	150	150

呼び名	寸法(mm)			土工(m <sup>2</sup> )			材 料				備 考		
	H	A	B	床掘	埋戻	残土	ベースコンクリート(t)	クラッシャーラン(t)	本体(本)	蓋板(枚)		歩掛り(k/m <sup>2</sup> )	
700 × 500	950	1640	1070	12.87	3.95	8.92	1.070	1.605	5.0	10.0	0.0028	(1)埋戻・残土量の体積変化による 質量変化は考慮していない。 (2)現場うち底部コンクリートの 歩掛りは別途計算上願います	
	600	1050		1700	14.54	4.79					9.75		0.0032
	700	1150		1760	16.27	5.69					10.58		0.0036
	800	1250		1820	18.06	6.65					11.41		0.0040
	900	1350		1880	19.91	7.67					12.24		0.0044
	1000	1450		1940	21.82	8.75					13.07		0.0046
	1100	1550		2000	23.79	9.89					13.90		0.0053
	1200	1650		2060	25.82	11.09					14.73		0.0057
	1300	1750		2120	27.91	12.35					15.68		0.0061
	1400	1850		2180	30.06	13.67					16.39		0.0065
800 × 600	1050	2240	1180	32.27	15.05	17.22	1.180	1.770	5.0	10.0	0.0069		
	1500	1950		2300	34.54	16.49					18.05		0.0074
	1600	2050		2300	34.54	16.49					18.05		0.0074
	1700	2150		2360	36.87	17.99					1.888		0.0076
	700	1160		1876	17.72	5.77					11.95		0.0032
	800	1260		1936	19.63	6.47					12.89		0.0036
	900	1360		1996	21.60	7.76					13.83		0.0040
	1000	1460		2056	23.62	8.85					14.77		0.0045
	1100	1560		2116	25.71	10.00					15.71		0.0049
	1200	1660		2176	27.85	11.20					16.65		0.0053
900 × 700	1300	1760	1290	30.06	12.47	17.58	1.935	1.935	5.0	10.0	0.0057		
	1400	1860		2296	32.33	13.79					18.53		0.0061
	1500	1960		2356	34.65	15.18					19.47		0.0066
	1600	2060		2416	37.04	16.63					20.41		0.0070
	1700	2160		2476	39.48	18.13					21.35		0.0074
	1800	2260		2536	41.99	19.70					22.29		0.0078
	800	1320		2082	22.26	7.22					15.04		0.0082
	900	1420		2142	24.37	8.28					16.09		0.0036
	1000	1520		2202	26.54	9.40					17.14		0.0040
	1100	1620		2262	28.77	10.58					18.19		0.0045
1000 × 500	1200	1720	1400	31.06	11.82	19.24	2.100	2.100	5.0	10.0	0.0049		
	1300	1820		2382	33.42	13.12					20.29		0.0053
	1400	1920		2442	35.83	14.49					21.34		0.0058
	1500	2020		2502	38.30	15.91					22.39		0.0062
	1600	2120		2562	40.83	17.39					23.44		0.0066
	1700	2220		2622	43.42	18.93					24.49		0.0070
	1800	2320		2682	46.08	20.53					25.54		0.0079
	1900	2420		2742	48.79	22.20					26.59		0.0083
	800	1130		2078	19.65	5.35					14.30		0.0087
	900	1230		2138	21.76	6.30					15.46		0.0028
1000 × 700	1300	1830	1400	23.93	7.31	16.62	2.100	2.100	5.0	10.0	0.0032		
	1400	1930		2198	26.15	8.37					17.78		0.0036
	1500	2030		2258	28.44	9.50					18.94		0.0040
	1600	2130		2318	30.79	10.69					20.10		0.0045
	1700	2230		2378	33.20	11.93					21.26		0.0050
	1800	2330		2438	35.67	13.24					22.42		0.0054
	1900	2430		2498	38.19	14.61					23.56		0.0058
	2000	2530		2558	40.78	16.04					24.74		0.0062
	1600	2130		2678	43.43	17.53					25.90		0.0066
	1700	2230		2738	46.14	19.07					27.06		0.0071
1000 × 900	1800	2330	1400	48.91	20.68	28.22	2.100	2.100	5.0	10.0	0.0075		
	1900	2430		2858	51.73	22.35					28.38		0.0079
	2000	2530		2918	54.62	24.08					30.54		0.0083
	1800	2330		2798	48.91	20.68					28.22		0.0087
	1900	2430		2858	51.73	22.35					28.38		0.0092
	2000	2530		2918	54.62	24.08					30.54		0.0092

紹  
介

河  
川

暗  
渠・防  
火水  
槽

下  
水  
道

道  
路

掘  
壁

水  
路

そ  
の  
他